

**CBHA****1,Brief Introduction**

CBHA Series solid tantalum electrolytic capacitors is Cylindrical ,Metal case

With polar radial leads are characterized in small size, low DC Leakage,

stable and excellent performances, high reliability and long life. CBHA

Series meets the requirements of Chinese Electronic industry standard Q/PWV20002-2002,

Suit for polar transform DC and pulse circuit

**2,General Characteristics**

Operating Temperature Range: -55°C ~ +125°C (>85°C with rated voltage derating)

Capacitance Tolerance:M=±20%,K=±10%

DC Leakage: at +20°C,  $I_0 \leq 0.01C U_R$  or  $0.5\mu A$ (Whichever is greater);

Temperature performance please see Table3

Outline , dimensions and max weight see table1

Rated Voltage,derated voltage and capacitance see table 2

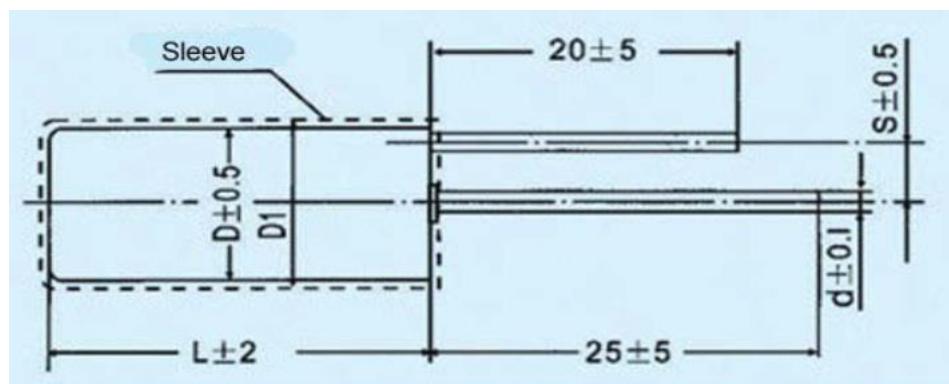
**3,Outline and dimensions:**

Table1:Outline dimension

Case Code	Weight (max.g)	Without insulation sleeve		With insulation sleeve		d±0.1 (mm)	s±0.5 (mm)
		D±0.5 (mm)	L±2 (mm)	D max (mm)	L max (mm)		
1	0.7	3.2	8	4.0	10	0.4	0.8
2	2.5	5	12	5.8	14	0.6	1.3
3	3.5	6	14	6.8	16	0.6	1.6
4	6.0	8	14	8.8	16	0.8	2.0
5	10.0	8	22	8.8	24	0.8	2.0
6	16.0	10	22	10.8	24	0.8	4.0

## CBHA



4, Rated voltage,Derated voltage and Capacitance Table 2

Rated Voltage(V)		6.3 0J	10 1A	16 1C	25 1E	32 1X	40 1G	63 1J
Derated Voltage(V)		4	6.3	10	16	20	25	40
Case Code		Nominal Capacitance(μF)						
1	6.8	3.3	2.2	1.5	1.0	0.68	0.22	0.33
	10	4.7	3.3	2.2	1.5	1.0	0.33	0.47
	15	10	4.7	3.3	2.2	1.5	0.68	0.68
	22	15	6.8	4.7	3.3	2.2	1.0	1.0
	33	22	10	6.8	4.7	3.3	1.5	1.5
2	47	33	15	10	6.8	4.7	2.2	2.2
	68	47	22	15	10	6.8	3.3	3.3
	100	68	47	22	15	10	4.7	4.7
	100	68	33	15	10	15	10	10
	150	150	100	47	22	22	6.8	6.8
4	220	150	100	68	33	33	10	10
	330	220	150	100	47	47	15	15
5	470	330	150	100	68	47	22	22
	680	470	220	150	100	68	33	33
6	1000	680	330	220	150	100	47	47


Feature of high and low temperature Table3:

Capacitance (μF)	Capacitance Change(%)			Maximum							
				Dissipation factor(%)				Leakage current(Ua)			
	-55°C	85°C	125°C	25°C	-55°C	85°C	125°C	85°C	125°C		
≤1	±8	±8	±10	3	3			8I <sub>0</sub>	10I <sub>0</sub>		
1.5~68				5	5						
100~330				6	6						
470~1000				8	8						

## CBHA



## PART NUMBER EXAMPLE

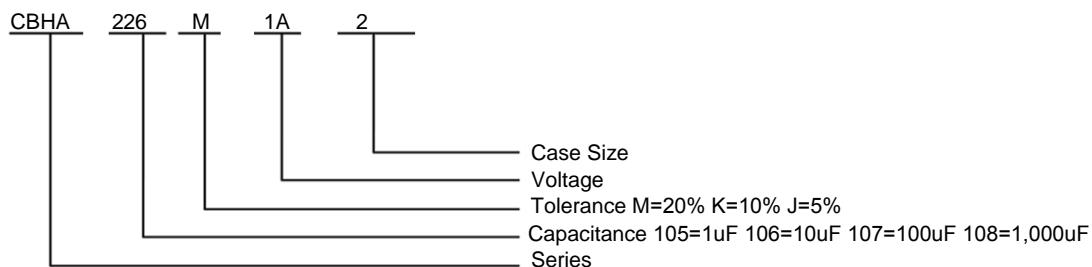

## Notes:

- 1、Tantalum capacitors can't been measured by multimeter (Easily cause irreversible damage and lead to reject)
- 2、Capacitance, DF measure frequency: 100Hz,  $U=2.2_{1.0}^0$  V,  $U=1.0_{0.5}^0$  V(effective value)
- 3、Measure leakage current above 85 °C, please use derated voltage.
- 4、Special size and big capacitance products, please negotiate with us