



CFDA: ELECTRICAL APPARATUS USE METALLIZED FILM WITH PRECISELY QUALITY CONTROL | EQUATIVE CBB65

FEATURES:


- Low D.F. (dissipation factor), good self-healing character
- High I.R. (insulation resistance)
- High safety & high reliability
- Anti-Striking current, strong over-carrier capacity

S P E C I F I C A T I O N S


OPERATING CONDITION	-40°C~+85°C
CAPACITANCE RANGE	2uF~100 uF (TS11-22~26)
CAPACITANCE TOLERANCE	J(±5%), K(±10%)
RATED VOLTAGE	370V, 450V (AC)
DISSIPATION FACTOR	<0.0040 (100Hz)
WITHSTAND VOLTAGE BETWEEN TERMINALS	2Un, 2s
WITHSTAND VOLTAGE BETWEEN TERMINALS AND CASE	2.2KV, 2s




CFDA-A




CFDA-B




CFDA-C



CFDA-D

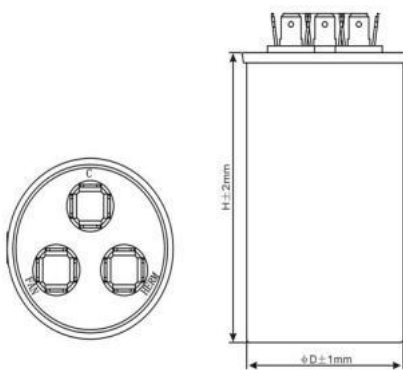

CFDA-E

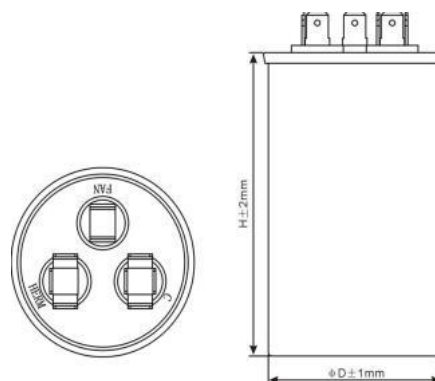

CFDA: ELECTRICAL APPARATUS USE METALLIZED FILM WITH PRECISELY QUALITY CONTROL | EQUATIVE CBB65



FEATURES:

- Low D.F. (dissipation factor), good self-healing character
- High I.R. (insulation resistance)
- High safety & high reliability
- Anti-Striking current, strong over-carrier capacity

Dimensions (mm)

CAP uF	CFDA-22, CFDA-23, CFDA-24				CAP uF	CFDA-25, CFDA-26	
	370VAC		450VAC			450VAC	
	D	H	D	H		D	H
1	40	55	40	55	20+1.5	50	85
1.5	40	55	40	55	20+5	50	85
2	40	55	40	55	25+1.5	50	95
2.5	40	55	40	55	25+3	50	95
3	40	55	40	55	25+5	50	95
3.5	40	55	40	55	30+2	50	95
4	40	55	40	55	30+5	50	95
4.5	40	55	40	55	30+7.5	50	100
5	40	55	40	55	35+2	50	100
6	40	55	40	55	35+5	50	110
7	--	--	40	65	40+5	50	120
7.5	40	55	40	65	40+7.5	50	125
8	40	55	40	65	45+5	50	120
10	40	65	40	75	45+7.5	50	125
12	40	75	40	75	50+5	50	130
12.5	40	75	40	75	50+7.5	55	125
14	40	75	45	75	55+5	55	120
15	40	75	45	75	55+6	55	120
16	45	75	45	75	55+7.5	55	125
17	45	75	45	75	60+5	60	120
17.5	45	75	45	75	60+6	60	120
18	45	75	50	75	60+7.5	60	125
20	45	75	50	75	65+5	60	120
25	45	75	50	85	70+5	60	120
30	50	85	50	100	80+5	60	130
35	50	100	50	100	--	--	--
40	50	100	50	110	--	--	--
45	50	110	55	110	--	--	--
50	50	100	55	110	--	--	--
55	50	125	55	125	--	--	--
60	55	125	55	125	--	--	--
65	55	125	60	125	--	--	--
70	55	125	60	125	--	--	--
80	60	125	65	125	--	--	--
100	65	125	65	125	--	--	--

PART NUMBER EXAMPLE

