

CHBA



FEATURES:





- As well as applications to small sized electronic apparatus, this series is designed for easy handing.
- Wide mounting sizes and variable adjustment available
- Lots of capacity ranges, 3pF through 90pF
- Sturdy mechanical structure against vibration or shock

SPECIFICATIONS

OPERATING TEMPERATURE RANGE	-30°C to +85°C
RATED WORKING VOLTAGE	100VDC
WITHSTANDING VOLTAGE	400VDC
INSULATION RESISTANCE	10 ⁴ MΩ min.
ROTATION TORQUE	35 to 200 g-cm
SOLDERING TEMPERATURE	260 ± 5°C



NORMAL TYPE

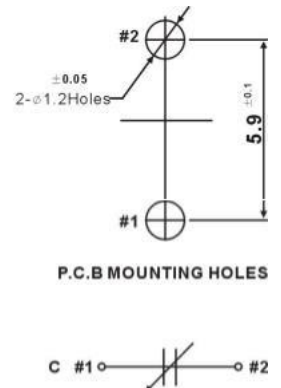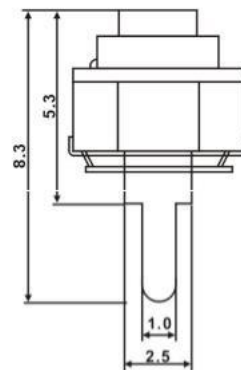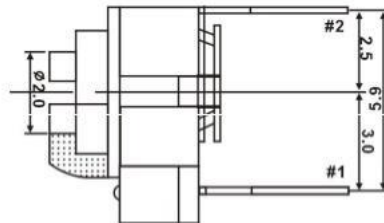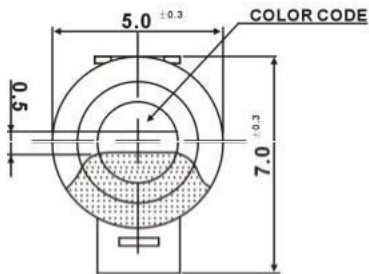

UNIT:MM

PART NO.	MIN. CAP. (PF)	MAX. CAP. (PF)	TEMP.COEFF. PPM/°C	Q Value	
				10MHz	100MHz
CHBA3R02A	1.3±50%	3.0 ⁺¹⁰⁰ ₋₀ %	0 ± 200	>300	>200
CHBA5R02A	2.0±50%	5.0 ⁺¹⁰⁰ ₋₀ %	-500 ± 300	>300	
CHBA1002A	4.0±50%	10.0 ⁺¹⁰⁰ ₋₀ %	-500 ± 300	>300	
CHBA2002A	6.0±50%	20.0 ⁺¹⁰⁰ ₋₀ %	-1000 ± 600	>300	
CHBA3002A	7.0±50%	30.0 ⁺¹⁰⁰ ₋₀ %	-1000 ± 600	>250	
CHBA4002A	8.				