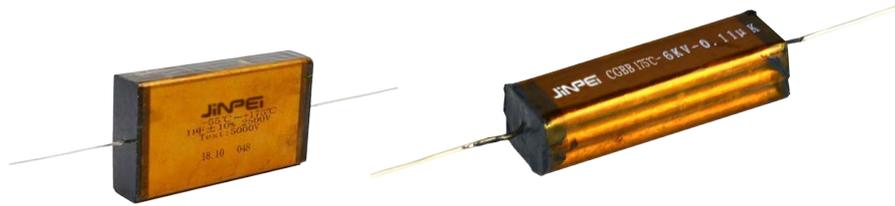


CGBB Mica Paper Capacitor: High temperature, high voltage**Feature:**

- ◆ Using the best mica paper 511 as material, dipping high temperature epoxy resin.
- ◆ As the high insulated resistance, low coefficient, good high frequency performance.
- ◆ Very low dissipation factor $<5 \times 10^{-3}$ (min 1×10^{-4}).
- ◆ Very stable at high temperature, small capacitance tolerance.
- ◆ After storage 15 years, capacitance change not over $\pm 1\%$.

Application:

- ◆ JINPEI CGBB series mica capacitors are suitable to high frequency, high voltage, high temperature, big current circuit. Like high frequency feedback circuit, high frequency resonance circuit and pulse circuit etc.
- ◆ Widely use in satellite, aerospace, ship, medical equipment, oil down-hole equipment, welding machine, metallurgy equipment etc.

General Characteristics:

- ◆ Temperature Range: $-55^{\circ}\text{C} \sim +175^{\circ}\text{C}$
- ◆ Capacitance Tolerance: $\pm 3\%, \pm 5\%, \pm 10\%$
- ◆ Relative Humidity: at $+40^{\circ}\text{C}$ can be 95~98%
- ◆ Atmospheric pressure: $4 \times 10^4 \text{Pa}$
- ◆ Vibration: frequency 20~200Hz, acceleration: 2.7~4.5g
- ◆ Working voltage: 2500V
- ◆ DC test voltage: After keep 1 hour at $+150^{\circ}\text{C}$, loading 1.5 times working voltage 1 minute, no breakdown and flashover.
- ◆ Insulation resistance(R): normal climate
 - Capacitance $C \geq 0.1 \mu\text{F}$ $R \geq 1000 \text{M}\Omega$
 - Capacitance $C < 0.1 \mu\text{F}$ $R > 5000 \text{M}\Omega$

CGBB Mica Paper Capacitor: High temperature,high voltage




Temperature characteristics:

- ◆ After keep at +175°C 1 hour, capacitance change not over ±10%, Insulation resistance $R > 500M\Omega$, Dissipation factor: $tg\delta \leq 5 \times 10^{-3}$ (1KHz), Pass D.C. rated voltage test.
- ◆ After keep at -55°C 1 hour, capacitance change not over ±7%, Insulation resistance $R > 500M\Omega$, Dissipation factor: $tg\delta \leq 5 \times 10^{-3}$ (1KHz), Pass D.C. rated voltage test.
- ◆ After keep at +40°C, relative Humidity 95~98% 48 hours, capacitance change not over ±5%, Insulation resistance $R > 500M\Omega$, Dissipation factor: $tg\delta \leq 5 \times 10^{-3}$ (1KHz), Pass D.C. rated voltage test.
- ◆ After keep at +195°C~+200°C 96 hours, capacitance change not over ±10%, Insulation resistance $R > 500M\Omega$, Dissipation factor: $tg\delta \leq 6 \times 10^{-3}$ (1KHz), Pass D.C. rated voltage test.
- ◆ After vibration test, capacitance change not over ±5%

Part Number	Capaitance (μF)	Working Voltage (V/DC)	Test Voltage (V/DC)	Dissipation Factor Max.
CGBB105K3Exxxx	1.0	2500 3E	5000	0.5%

Dimensions: unit: mm

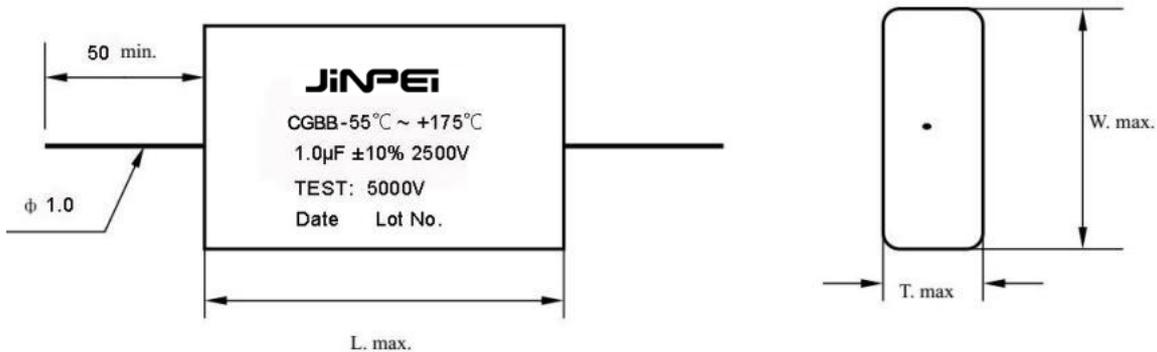

L Max.	W Max.	T Max.	Terminals
83mm	48mm	20mm	Axial wire leaded

PART NUMBER EXAMPLE

CGBB 105 K 3E xxx xxx xxx

