

# CABAC

for defense




- 125 °C series, high heat resistance, leaded type.
- Low ESR, high frequency and low impedance.
- The national military standard level meets the environmental requirements of vibration and low pressure.
- It is suitable for energy storage, filtering and bypass in electronic circuits in aerospace, aviation, cold, high altitude and ocean.
- Main technical indicators

item	characteristic	
Operating temperature range	-55°C~+125°C	
Rated operating voltage range	10V~100V	
Nominal capacitance range	8.2μF~22000μF	
Allowable deviation of nominal capacitance	M (±20%) (25°C, 120Hz)	
DC leakage current*1	I≤0.01CRUR (μA) (25°C, 2min) C <sub>R</sub> : Nominal capacitance (μF); U <sub>R</sub> : Rated voltage (V)	
Loss tangent tgδ (max)	For details, please refer to the "List of Product Specifications and Technical Parameters" (25°C, 120Hz)	
ESR (maximum)*2	For details, please refer to the "List of Product Specifications and Technical Parameters" (25°C, 100KHz)	
Low temperature characteristics (capacitance rate of change)	(C <sub>25°C</sub> -C <sub>.55°C</sub> ) /C <sub>25°C</sub> ≤35% (25°C, 120Hz)	
Durability (High Temperature Test)	The rated voltage is applied at 125 °C for 2000h, and after recovery for 24h, the test is at room temperature (25 °C±5 °C), and its electrical performance conforms to:	
	Rate of change in capacitance	≤± 15% of initial measurements
	DC leakage current	≤ initial prescriptive value
	The loss angle is tangent	≤ initial measurements
Store at high temperatures	After storage at 125 °C for 1000h, recovery for 24 h, and test at room temperature (25 °C±5 °C), its electrical performance conforms to:	
	Rate of change in capacitance	≤± 15% of initial measurements
	DC leakage current	≤ initial prescriptive value
	The loss angle is tangent	≤ initial measurements
	ESR	≤ 200% of the initial measurement

Execution standard number: Q/MN21002—2020 GJB10175—2021 Note:

- 1) 1KΩ protection resistor in series during testing and charging;
- 2) The test location is the root of the capacitor lead terminal.

■ Outline drawing and size table (mm)

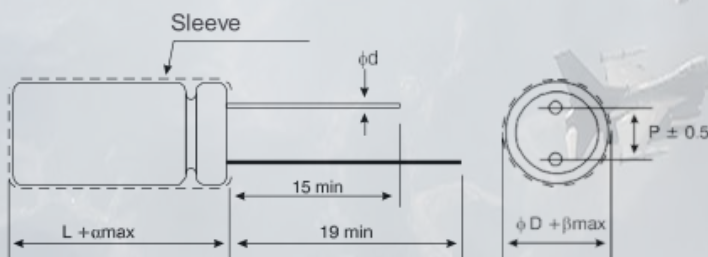

∅	6.3	8	10	12.5	16	18
F	2.5	3.5	5.0		7.5	
d	0.6				0.8	
A	1.0		2.0			
B	0.5			1.0		

# CABAC

for defense

■ List of product specifications and technical parameters

rated voltage V	capacity $\mu\text{F}$	Dimensions D $\times$ L (mm)	tg $\delta$ (120Hz)	ESR (m $\Omega$ ,25 $^{\circ}\text{C}$ ) (100kHz)	Ripple current mA,rms (100kHz, 125 $^{\circ}\text{C}$ )
10 1A	270	6.3 $\times$ 8	0.12	28	880
	330	6.3 $\times$ 11	0.12	25	1040
	390	6.3 $\times$ 11	0.12	25	1040
	470	8 $\times$ 8	0.12	25	1040
	560	8 $\times$ 8	0.12	25	1040
	680	8 $\times$ 11.5	0.12	20	1200
	820	8 $\times$ 11.5	0.12	20	1200
	1000	10 $\times$ 10	0.12	18	1200
	1200	10 $\times$ 12.5	0.13	18	1360
	1500	10 $\times$ 12.5	0.13	18	1360
	1800	10 $\times$ 16	0.13	18	1520
	2200	10 $\times$ 20	0.13	18	1600
	2700	12.5 $\times$ 16	0.13	15	1760
	3300	12.5 $\times$ 20	0.14	15	1920
	3900	12.5 $\times$ 20	0.14	15	1920
	4700	12.5 $\times$ 25	0.15	15	2000
	5600	12.5 $\times$ 25	0.15	15	2000
	6800	16 $\times$ 25	0.16	15	2120
	8200	16 $\times$ 25	0.16	15	2120
	10000	16 $\times$ 30	0.17	15	2320
12000	16 $\times$ 35	0.18	15	2400	
15000	18 $\times$ 30	0.18	15	2400	
18000	18 $\times$ 35	0.18	15	2520	
22000	18 $\times$ 40	0.19	15	2680	
16 1C	180	6.3 $\times$ 8	0.12	28	880
	220	6.3 $\times$ 8	0.12	28	880
	270	6.3 $\times$ 11	0.12	25	1040
	330	8 $\times$ 8	0.12	25	1040
	390	8 $\times$ 8	0.12	25	1040
	470	8 $\times$ 11.5	0.12	20	1200
	560	8 $\times$ 11.5	0.12	20	1200
	680	10 $\times$ 10	0.12	18	1200
	820	10 $\times$ 12.5	0.12	18	1360
	1000	10 $\times$ 12.5	0.12	18	1360
	1200	10 $\times$ 16	0.12	18	1520
	1500	12.5 $\times$ 16	0.13	15	1760
	1800	12.5 $\times$ 16	0.13	15	1760
	2200	12.5 $\times$ 20	0.13	15	1920
	2700	12.5 $\times$ 20	0.14	15	1920
	3300	12.5 $\times$ 25	0.14	15	2000

rated voltage V	capacity $\mu\text{F}$	Dimensions D $\times$ L (mm)	tg $\delta$ (120Hz)	ESR (m $\Omega$ ,25 $^{\circ}\text{C}$ ) (100kHz)	Ripple current mA,rms (100kHz, 125 $^{\circ}\text{C}$ )	
16 1C	3900	12.5 $\times$ 25	0.15	15	2000	
	4700	16 $\times$ 25	0.15	15	2120	
	5600	16 $\times$ 30	0.16	15	2320	
	6800	16 $\times$ 35	0.16	15	2360	
	8200	16 $\times$ 35	0.16	15	2360	
	10000	18 $\times$ 30	0.17	15	2400	
	12000	18 $\times$ 35	0.18	15	2520	
	15000	18 $\times$ 40	0.18	15	2680	
	20 1D	100	6.3 $\times$ 8	0.12	28	960
		120	6.3 $\times$ 8	0.12	28	960
150		6.3 $\times$ 11	0.12	25	1120	
180		6.3 $\times$ 11	0.12	25	1120	
220		8 $\times$ 8	0.12	25	1120	
270		8 $\times$ 11.5	0.12	20	1280	
330		8 $\times$ 11.5	0.12	20	1280	
390		10 $\times$ 10	0.12	18	1280	
470		10 $\times$ 12.5	0.12	18	1440	
560		10 $\times$ 12.5	0.12	18	1440	
680		10 $\times$ 16	0.12	18	1600	
820		10 $\times$ 16	0.12	18	1600	
1000		12.5 $\times$ 16	0.13	18	1880	
1200		12.5 $\times$ 16	0.13	18	1880	
1500		12.5 $\times$ 20	0.13	18	2080	
1800		12.5 $\times$ 20	0.14	18	2080	
2200		12.5 $\times$ 25	0.14	15	2120	
2700		12.5 $\times$ 25	0.14	15	2120	
25 1E	3300	16 $\times$ 25	0.14	15	2240	
	3900	16 $\times$ 30	0.15	15	2320	
	4700	16 $\times$ 35	0.15	15	2480	
	5600	16 $\times$ 35	0.15	15	2480	
	6800	18 $\times$ 35	0.16	15	2560	
	8200	18 $\times$ 40	0.16	15	2640	
	10000	18 $\times$ 40	0.16	15	2640	
	100	6.3 $\times$ 8	0.12	28	800	
	120	6.3 $\times$ 11	0.12	25	960	
	150	6.3 $\times$ 11	0.12	25	960	
180	8 $\times$ 8	0.12	25	1120		
220	8 $\times$ 11.5	0.12	20	1280		
270	8 $\times$ 11.5	0.12	20	1280		
330	10 $\times$ 10	0.12	18	1280		

# CABAC

for defense

List of specifications and technical parameters

rated voltage V	capacity μF	Dimensions D×L (mm)	tgδ (120Hz)	ESR (mΩ,25℃) (100kHz)	Ripple current mA,rms (100kHz, 125℃)
25 1E	390	10×10	0.12	18	1280
	470	10×12.5	0.12	18	1440
	560	10×12.5	0.12	18	1440
	680	10×16	0.12	18	1600
	820	12.5×16	0.12	16	1880
	1000	12.5×16	0.12	16	1880
	1200	12.5×20	0.13	16	2080
	1500	12.5×20	0.13	16	2080
	1800	12.5×25	0.14	15	2120
	2200	16×25	0.14	15	2240
	2700	16×25	0.14	15	2240
	3300	16×30	0.14	15	2360
	3900	16×35	0.14	15	2480
	4700	18×30	0.14	15	2560
	5600	18×30	0.15	15	2560
	6800	18×35	0.15	15	2600
8200	18×40	0.16	15	2640	
35 1V	68	6.3×8	0.12	28	880
	82	6.3×11	0.12	25	1040
	100	8×8	0.12	25	1040
	120	8×8	0.12	25	1040
	150	8×11.5	0.12	22	1200
	180	8×11.5	0.12	22	1200
	220	10×10	0.12	20	1200
	270	10×12.5	0.12	20	1360
	330	10×16	0.12	20	1520
	390	12.5×16	0.12	20	1760
	470	12.5×16	0.12	20	1760
	560	12.5×20	0.12	17	1920
	680	12.5×25	0.12	17	2120
	820	12.5×25	0.12	17	2120
	1000	16×25	0.12	17	2400
	1200	16×25	0.13	17	2400
	1500	16×30	0.13	17	2480
	1800	16×35	0.13	17	2480
	2200	18×30	0.13	17	2480
	2700	18×30	0.13	17	2480
3300	18×35	0.13	17	2640	
3900	18×35	0.13	17	2640	
4700	18×40	0.13	17	2800	

rated voltage V	capacity μF	Dimensions D×L (mm)	tgδ (120Hz)	ESR (mΩ,25℃) (100kHz)	Ripple current mA,rms (100kHz, 125℃)
40 1G	47	6.3×8	0.12	35	880
	56	6.3×11	0.12	32	1040
	68	6.3×11	0.12	32	1040
	82	8×8	0.12	32	1040
	100	8×11.5	0.12	30	1200
	120	8×11.5	0.12	30	1200
	150	10×10	0.12	28	1200
	180	10×10	0.12	28	1200
	220	10×12.5	0.12	25	1360
	270	10×16	0.12	22	1520
	330	10×16	0.12	22	1520
	390	12.5×16	0.12	20	1760
	470	12.5×16	0.12	20	1760
	560	12.5×20	0.12	20	1920
	680	12.5×20	0.12	20	1920
	820	12.5×25	0.12	20	2120
	1000	12.5×25	0.12	20	2120
	1200	16×25	0.12	17	2400
	1500	16×30	0.12	16	2440
	1800	16×35	0.12	16	2480
2200	16×35	0.12	16	2480	
2700	18×35	0.12	16	2640	
3300	18×40	0.12	16	2800	
50 1H	27	6.3×8	0.12	35	640
	33	6.3×11	0.12	32	800
	39	6.3×11	0.12	32	800
	47	8×8	0.12	32	800
	56	8×8	0.12	32	800
	68	8×11.5	0.12	30	960
	82	10×10	0.12	28	960
	100	10×10	0.12	28	960
	120	10×12.5	0.12	25	1120
	150	10×16	0.12	21	1280
	180	10×16	0.12	21	1280
	220	12.5×16	0.12	18	1600
	270	12.5×16	0.12	18	1600
	330	12.5×20	0.12	18	1720
	390	12.5×20	0.12	18	1720
	470	12.5×25	0.12	17	1800
560	12.5×25	0.12	17	1800	

# CABAC

for defense

■ List of specifications and technical parameters

rated voltage V	capacity $\mu\text{F}$	Dimensions D×L (mm)	$\text{tg}\delta$ (120Hz)	ESR ( $\text{m}\Omega, 25^\circ\text{C}$ ) (100kHz)	Ripple current mA,rms (100kHz, 125 $^\circ\text{C}$ )
50 1H	680	16×25	0.12	16	2040
	820	16×30	0.12	16	2200
	1000	16×35	0.12	16	2280
	1200	16×35	0.12	16	2280
	1500	18×30	0.12	16	2400
	1800	18×35	0.12	16	2520
	2200	18×40	0.12	16	2680
63 1J	18	6.3×8	0.10	45	640
	22	6.3×11	0.10	40	800
	27	8×8	0.10	40	800
	33	8×8	0.10	40	800
	39	8×11.5	0.10	35	960
	47	8×11.5	0.10	35	960
	56	10×10	0.10	30	960
	68	10×12.5	0.10	25	1120
	82	10×12.5	0.10	25	1120
	100	10×16	0.10	22	1280
	120	10×16	0.10	22	1280
	150	12.5×16	0.10	18	1520
	180	12.5×16	0.10	18	1520
	220	12.5×20	0.10	17	1800
	270	12.5×25	0.10	17	2000
	330	12.5×25	0.10	17	2000
	390	16×25	0.10	16	2240
	470	16×25	0.10	16	2240
	560	16×30	0.10	16	2320
	680	16×35	0.10	16	2360
820	18×30	0.10	16	2360	
1000	18×35	0.10	16	2400	
1200	18×40	0.10	16	2680	
80 1K	8.2	6.3×8	0.10	50	520
	10	6.3×11	0.10	45	680
	12	6.3×11	0.10	45	680
	15	8×8	0.10	45	680
	18	8×11.5	0.10	40	840
	22	8×11.5	0.10	40	840

rated voltage V	capacity $\mu\text{F}$	Dimensions D×L (mm)	$\text{tg}\delta$ (120Hz)	ESR ( $\text{m}\Omega, 25^\circ\text{C}$ ) (100kHz)	Ripple current mA,rms (100kHz, 125 $^\circ\text{C}$ )
80 1K	27	8×11.5	0.10	40	840
	33	10×10	0.10	35	840
	39	10×12.5	0.10	30	1000
	47	10×12.5	0.10	30	1000
	56	10×16	0.10	25	1160
	68	10×20	0.10	24	1320
	82	12.5×16	0.10	22	1400
	100	12.5×20	0.10	20	1480
	120	12.5×20	0.10	20	1480
	150	12.5×25	0.10	18	1800
	180	12.5×25	0.10	18	1800
	220	16×25	0.10	18	2000
	270	16×30	0.10	18	2160
	330	16×35	0.10	18	2320
	390	18×30	0.10	17	2320
	470	18×35	0.10	17	2360
100 2A	560	18×40	0.10	17	2480
	680	18×40	0.10	17	2480
	27	10×10	0.12	40	480
	33	10×12.5	0.12	35	640
	39	10×12.5	0.12	35	640
	47	10×16	0.12	30	784
	56	10×20	0.12	26	1040
	68	12.5×16	0.12	24	1160
	82	12.5×20	0.12	22	1280
	100	12.5×20	0.12	22	1280
	120	12.5×25	0.12	22	1560
	150	12.5×25	0.12	22	1560
	180	16×25	0.12	20	1760
	220	16×25	0.12	20	1760
	270	16×30	0.12	20	1880
	330	16×35	0.12	20	2040
390	18×30	0.12	19	2040	
470	18×35	0.12	19	2160	
560	18×40	0.12	18	2280	

■ Ripple current frequency coefficient

Frequency (f)	$1\text{KHz} \leq f < 10\text{KHz}$	$10\text{KHz} \leq f < 100\text{KHz}$	$100\text{KHz} \leq f < 300\text{KHz}$
coefficient	0.05	0.3	1.0