

CADAC

for defense




- Solder pin structure, high pressure product, small volume.
  - There are reliability indicators, and there are five levels of failure rate (  $\lambda \leq 1 \times 10^{-5}$  )
  - It meets the environmental requirements of the national military standard GJB603A-2021
  - such as vibration, low pressure, and humidity resistance
  - It is suitable for filtering and energy storage in the electronic unified circuit of aerospace, aviation, alpine, high altitude and ocean.
- Main technical parameters:

Item	characteristic
Operating temperature range	-40℃~+105℃
Rated operating voltage range	400V~450V
Nominal capacitance range	82~1000 μ F
Allowable deviation of nominal capacitance	M ( ±20% ) ( 25℃ , 100Hz )
DC leakage current( 25℃ , 5min )	$I \leq 0.01 C_R U_R$ ( μ A ) $C_R$ : Nominal capacitance ( μF ); $U_R$ : Rated voltage ( V )
DF δ ( max )	For details, please refer to the "List of Product Specifications and Technical Parameters" ( 25℃ , 100Hz )
Temperature characteristics ( 100Hz, impedance ratio )	$Z_{-40℃} / Z_{+25℃} \leq 12$
Rated ripple current	For details, please refer to the "List of Product Specifications and Technical Parameters" ( 105℃ , 100Hz )
Durability ( High Temperature Test )	The rated voltage with ripple current is applied at 105℃ for 2000h, and after recovery for 24h, the rated voltage with ripple current is tested at room temperature ( 25℃ ± 5℃ ), and its electrical performance is in accordance with the test:
	Rate of change in capacitance ≤ ± 20% Initial measurements
	DC leakage current ≤ Initial prescriptive value
	The DF ≤ 200% Initial measurements
Store at high temperatures	Left at 105℃ for 1000h, after the test, the normal temperature ( 25℃ ± 5℃ ) was restored to the test, and its electrical properties were in line with:
	Rate of change in capacitance ≤ ± 15% Initial measurements
	DC leakage current ≤ 200% Initial prescriptive value
	The DF ≤ 200% Initial measurements

Execution standard number: Q/MN20088—2023 GJB603A—2011

■ Outline drawings and size charts ( mm )

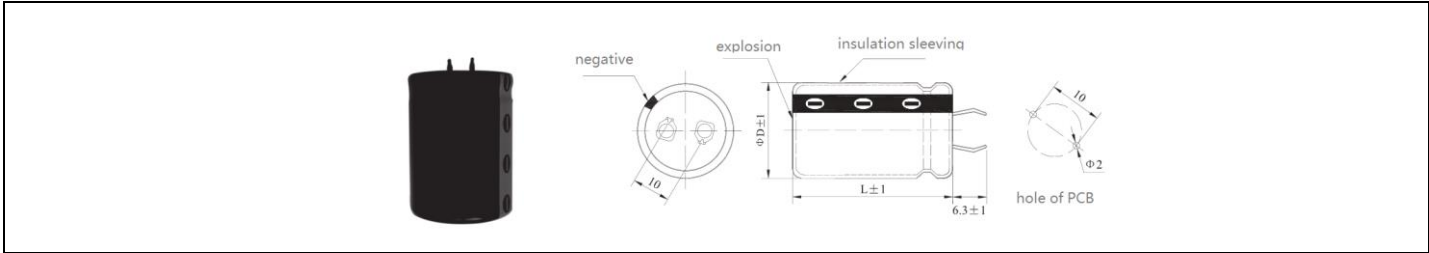

## CADAC

for defense

## ■ List of product specifications and technical parameters

Rated voltage (V)	capacity (μF)	Dimensions D×L (mm)	tgδ (100Hz)	Ripple current (mA,rms)
400 2G	100	22×25	0.20	494
	120	22×30	0.20	577
	120	25×25	0.20	577
	150	22×35	0.20	707
	150	25×30	0.20	707
	220	22×45	0.20	924
	220	25×35	0.20	924
	270	25×40	0.20	1038
	270	30×30	0.20	1038
	330	25×45	0.20	1240
	330	30×35	0.20	1240
	390	35×30	0.20	1180
	390	30×40	0.20	1180
	470	30×45	0.20	1400
	470	35×35	0.20	1400
	560	35×40	0.20	1638
	680	35×50	0.20	2017
	820	35×55	0.20	2324
	1000	35×60	0.20	2680

Rated voltage (V)	capacity (μF)	Dimensions D×L (mm)	tgδ (100Hz)	Ripple current (mA,rms)
450 2W	82	22×30	0.20	472
	100	25×25	0.20	507
	100	22×35	0.20	507
	120	25×30	0.20	610
	120	22×40	0.20	610
	150	25×35	0.20	735
	180	30×25	0.20	745
	180	22×45	0.20	745
	220	25×40	0.20	900
	220	30×30	0.20	900
	270	25×45	0.20	1080
	270	35×30	0.20	1080
	270	25×45	0.20	1080
	270	30×35	0.20	1080
	330	35×30	0.20	1260
	330	30×40	0.20	1146
	330	35×35	0.20	1158
	470	30×50	0.20	1470
	470	35×40	0.20	1470
	560	35×50	0.20	1800
	680	35×55	0.20	2080
	820	35×60	0.20	2390

Part number example

CADAC 102 M 2G 350600  
series capacitance tolerance voltage dimension